

Bioengineering 280A
Principles of Biomedical Imaging

Fall Quarter 2004
Lecture 5
Sampling

T.T. Liu, BE280A, UCSD Fall 2004

Topics

1. Overview of Sampling
2. 1D Sampling
3. 2D Sampling
4. Aliasing

T.T. Liu, BE280A, UCSD Fall 2004


Analog vs. Digital

The Analog World:
Continuous time/space, continuous valued signals or images, e.g. vinyl records, photographs, x-ray films.

The Digital World:
Discrete time/space, discrete-valued signals or images, e.g. CD-Roms, DVDs, digital photos, digital x-rays, CT, MRI, ultrasound.

T.T. Liu, BE280A, UCSD Fall 2004

The Process of Sampling

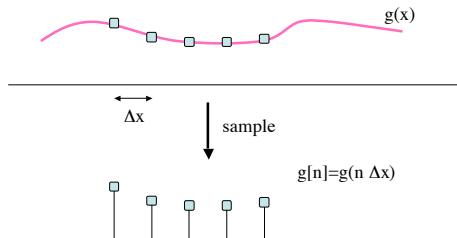

T.T. Liu, BE280A, UCSD Fall 2004

Questions


How finely do we need to sample?

What happens if we don't sample finely enough?


Can we reconstruct the original signal or image from its samples?

T.T. Liu, BE280A, UCSD Fall 2004


Sampling in the Time Domain

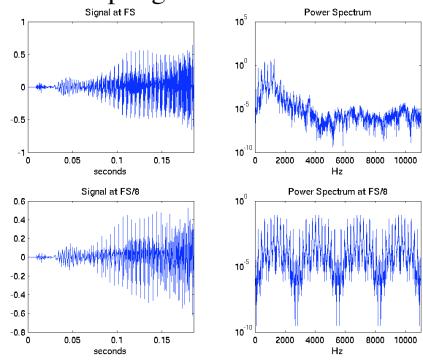


Sampling in Image Space

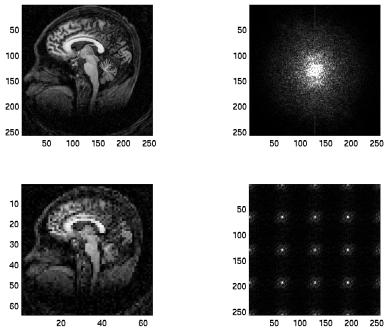

Sampling in k-space

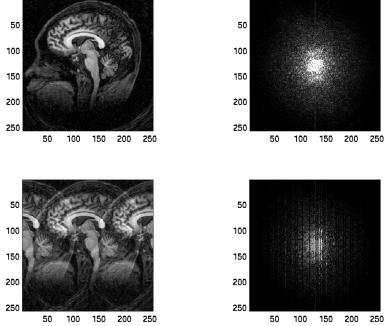


Sampling in k-space

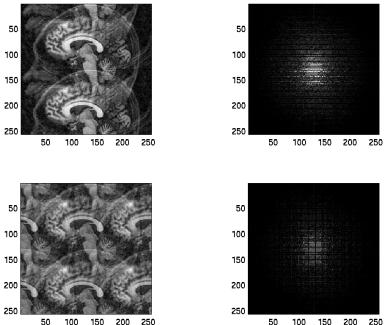

1

Comb Function

$$comb(x) = \sum_{n=-\infty}^{\infty} \delta(x - n)$$




Other names: Impulse train, bed of nails, shah function.

T.T. Liu, BE280A, UCSD Fall 2004

Scaled Comb Function

$$\begin{aligned} comb\left(\frac{x}{\Delta x}\right) &= \sum_{n=-\infty}^{\infty} \delta\left(\frac{x}{\Delta x} - n\right) \\ &= \sum_{n=-\infty}^{\infty} \delta\left(\frac{x - n\Delta x}{\Delta x}\right) \\ &= \Delta x \sum_{n=-\infty}^{\infty} \delta(x - n\Delta x) \end{aligned}$$



T.T. Liu, BE280A, UCSD Fall 2004

1D spatial sampling


$$\begin{aligned} g_s(x) &= g(x) \frac{1}{\Delta x} comb\left(\frac{x}{\Delta x}\right) \\ &= g(x) \sum_{n=-\infty}^{\infty} \delta(x - n\Delta x) \\ &= \sum_{n=-\infty}^{\infty} g(n\Delta x) \delta(x - n\Delta x) \end{aligned}$$

Recall the sifting property $\int_{-\infty}^{\infty} g(x) \delta(x - a) dx = g(a)$

But we can also write $\int_{-\infty}^{\infty} g(a) \delta(x - a) dx = g(a) \int_{-\infty}^{\infty} \delta(x - a) dx = g(a)$

So, $g(x) \delta(x - a) = g(a) \delta(x - a)$

T.T. Liu, BE280A, UCSD Fall 2004

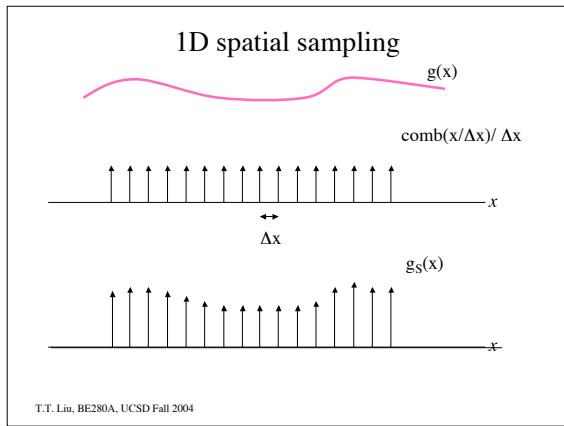

T.T. Liu, BE280A, UCSD Fall 2004

Fourier Transform of comb(x)

$$F[comb(x)] = comb(k_x)$$

$$= \sum_{n=-\infty}^{\infty} \delta(k_x - n)$$

$$F\left[\frac{1}{\Delta x} comb(\frac{x}{\Delta x})\right] = \frac{1}{\Delta x} \Delta x comb(k_x \Delta x)$$

$$= \sum_{n=-\infty}^{\infty} \delta(k_x \Delta x - n)$$

$$= \frac{1}{\Delta x} \sum_{n=-\infty}^{\infty} \delta(k_x - \frac{n}{\Delta x})$$


T.T. Liu, BE280A, UCSD Fall 2004

Fourier Transform of $g_s(x)$

$$\begin{aligned}
 F[g_s(x)] &= F\left[g(x) \frac{1}{\Delta x} \text{comb}\left(\frac{x}{\Delta x}\right)\right] \\
 &= G(k_x) * F\left[\frac{1}{\Delta x} \text{comb}\left(\frac{x}{\Delta x}\right)\right] \\
 &= G(k_x) * \frac{1}{\Delta x} \sum_{n=-\infty}^{\infty} \delta\left(k_x - \frac{n}{\Delta x}\right) \\
 &= \frac{1}{\Delta x} \sum_{n=-\infty}^{\infty} G(k_x) * \delta\left(k_x - \frac{n}{\Delta x}\right) \\
 &= \frac{1}{\Delta x} \sum_{n=-\infty}^{\infty} G\left(k_x - \frac{n}{\Delta x}\right)
 \end{aligned}$$


T.T. Liu, BE280A, UCSD Fall 2004

Fourier Transform of $g_s(x)$

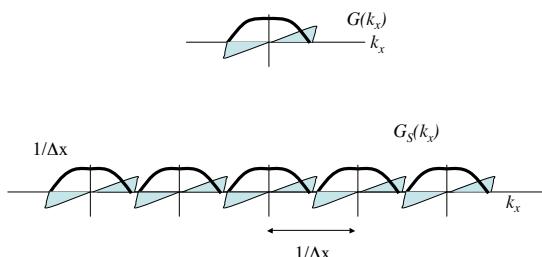


T.T. Liu, BE280A, UCSD Fall 2004


Nyquist Condition

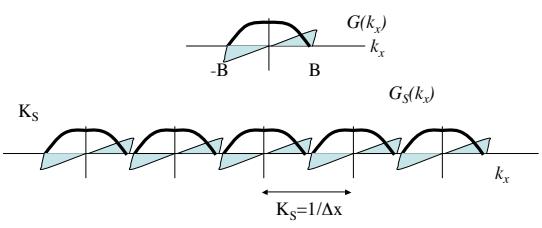


To avoid overlap, we require that $1/\Delta x > 2B$ or $K_s > 2B$ where $K_s = 1/\Delta x$ is the sampling frequency


T.T. Liu, BE280A, UCSD Fall 2004

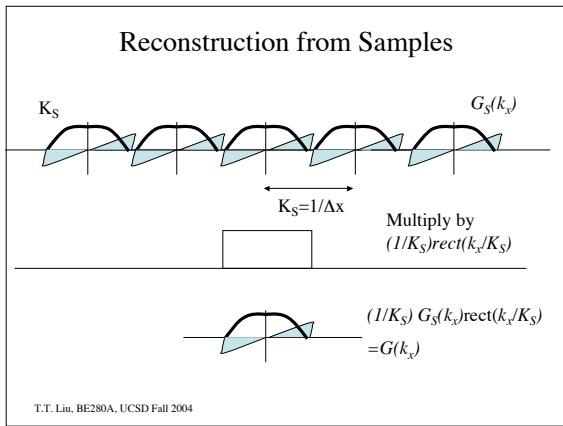

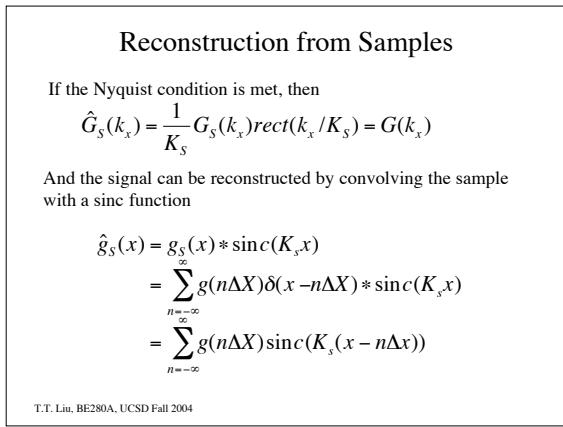

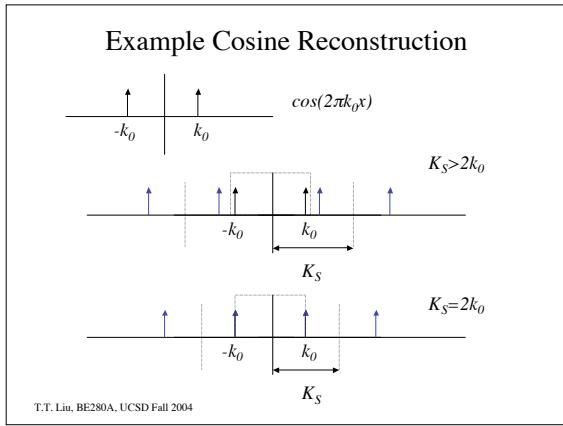


Cosine Example with $K_s=2k_0$

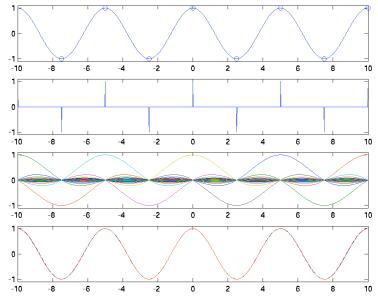


T.T. Liu, BE280A, UCSD Fall 2004

Example with $K_s=4k_0$

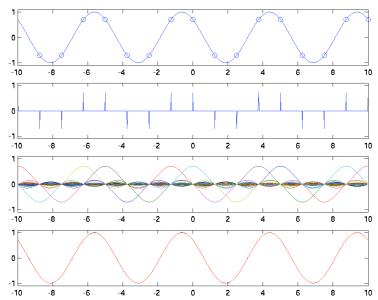


T.T. Liu, BE280A, UCSD Fall 2004

Example with $K_s=8k_0$

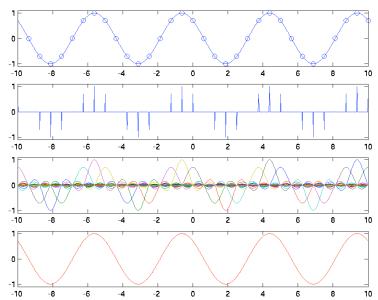


T.T. Liu, BE280A, UCSD Fall 2004

Sine Example with $K_s=2k_0$

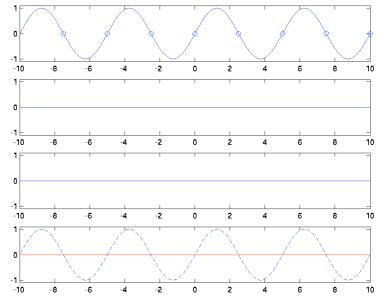


T.T. Liu, BE280A, UCSD Fall 2004

Example Sine Reconstruction

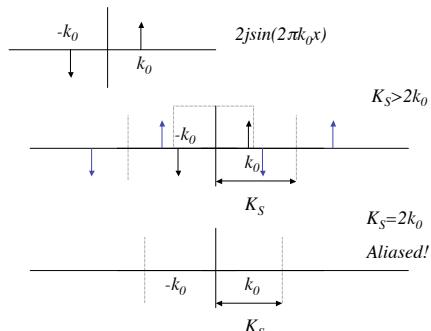

T.T. Liu, BE280A, UCSD Fall 2004


Aliasing

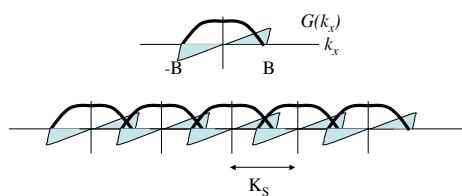

Aliasing occurs when the Nyquist condition is not satisfied.
This occurs for $K_s \leq 2B$


T.T. Liu, BE280A, UCSD Fall 2004

Aliasing Example

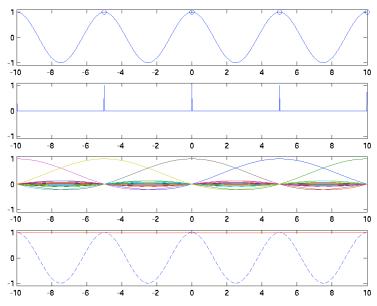


T.T. Liu, BE280A, UCSD Fall 2004

Aliasing Example

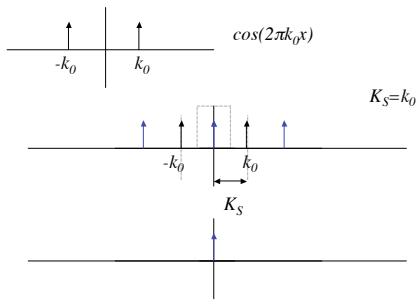

T.T. Liu, BE280A, UCSD Fall 2004

Aliasing Example

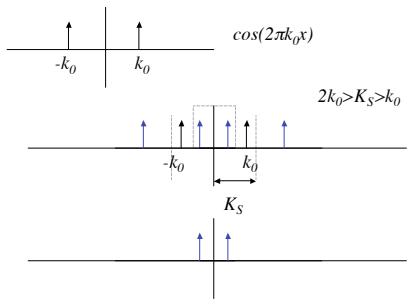


T.T. Liu, BE280A, UCSD Fall 2004

Practical Considerations


Why sample higher than the Nyquist frequency?

- true sinc interpolation is not practical since the sinc function goes from -infinity to infinity
- the requirements on the low-pass filter are reduced.

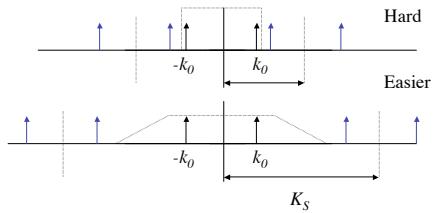


T.T. Liu, BE280A, UCSD Fall 2004

Fourier Sampling

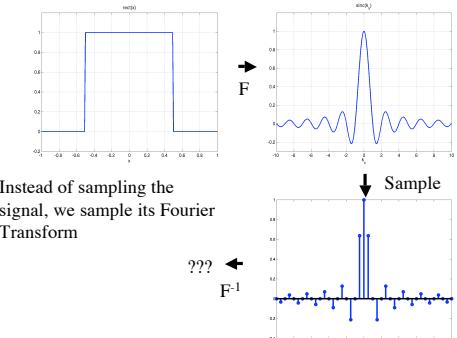

T.T. Liu, BE280A, UCSD Fall 2004


Fourier Sampling

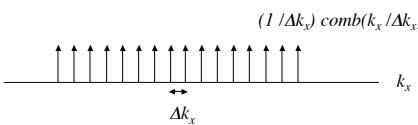

$$\begin{aligned} G_s(k_x) &= G(k_x) \frac{1}{\Delta k_x} \text{comb}\left(\frac{k_x}{\Delta k_x}\right) \\ &= G(k_x) \sum_{n=-\infty}^{\infty} \delta(k_x - n\Delta k_x) \\ &= \sum_{n=-\infty}^{\infty} G(n\Delta k_x) \delta(k_x - n\Delta k_x) \end{aligned}$$

T.T. Liu, BE280A, UCSD Fall 2004

Fourier Sampling -- Inverse Transform

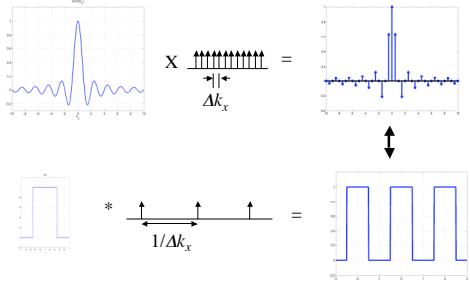


T.T. Liu, BE280A, UCSD Fall 2004

Fourier Sampling -- Inverse Transform

$$\begin{aligned}
 g_s(x) &= F^{-1}[G_s(k_x)] \\
 &= F^{-1}\left[G(k_x) \frac{1}{\Delta k_x} \text{comb}\left(\frac{k_x}{\Delta k_x}\right)\right] \\
 &= F^{-1}[G(k_x)] * F^{-1}\left[\frac{1}{\Delta k_x} \text{comb}\left(\frac{k_x}{\Delta k_x}\right)\right] \\
 &= g(x) * \text{comb}(x\Delta k_x) \\
 &= g(x) * \sum_{n=-\infty}^{\infty} \delta(x\Delta k_x - n) \\
 &= g(x) * \frac{1}{\Delta k_x} \sum_{n=-\infty}^{\infty} \delta(x - \frac{n}{\Delta k_x}) \\
 &= \frac{1}{\Delta k_x} \sum_{n=-\infty}^{\infty} g(x - \frac{n}{\Delta k_x})
 \end{aligned}$$



T.T. Liu, BE280A, UCSD Fall 2004

Nyquist Condition




To avoid overlap, $1/\Delta k_x > \text{FOV}$, or equivalently, $\Delta k_x < 1/\text{FOV}$

T.T. Liu, BE280A, UCSD Fall 2004

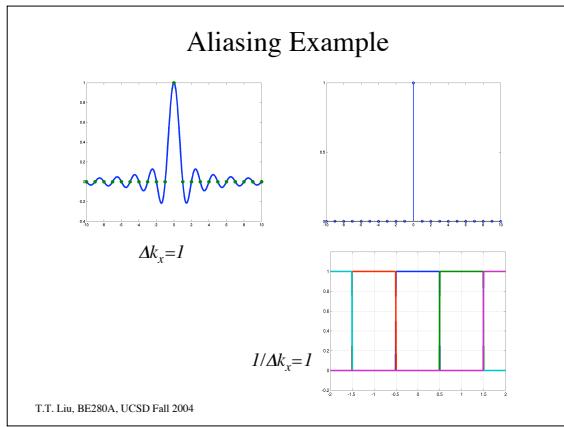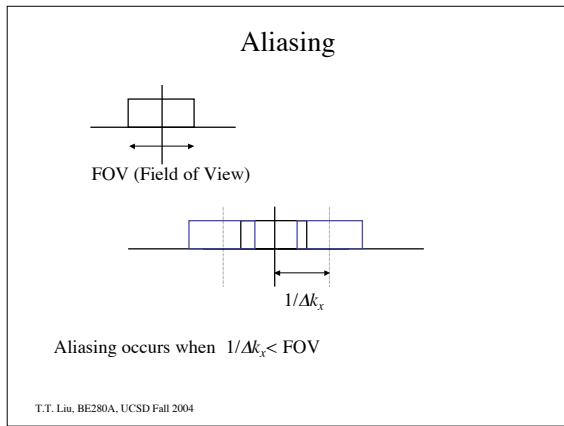


$$\begin{aligned} comb(x,y) &= \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} \delta(x-m, y-n) \\ &= \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} \delta(x-m) \delta(y-n) \\ &= comb(x)comb(y) \end{aligned}$$

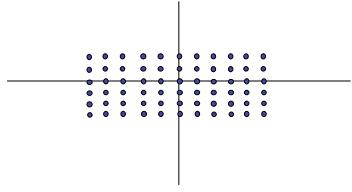


Scaled 2D Comb Function

$$\begin{aligned} \text{comb}(x/\Delta x, y/\Delta y) &= \text{comb}(x/\Delta x)\text{comb}(y/\Delta y) \\ &= \Delta x\Delta y \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} \delta(x - m\Delta x)\delta(y - n\Delta y) \end{aligned}$$

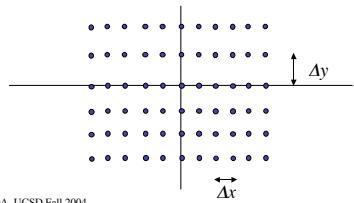

T.T. Liu, BE280A, UCSD Fall 2004

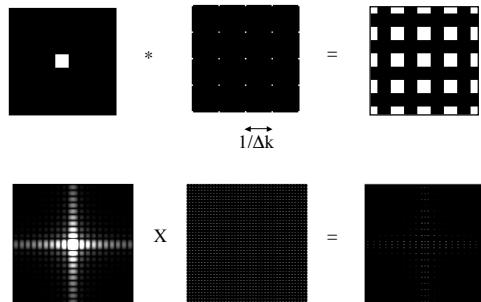

T.T. Liu, BE280A, UCSD Fall 2004

2D k-space sampling

$$\begin{aligned} G_s(k_x, k_y) &= G(k_x, k_y) \frac{1}{\Delta k_x \Delta k_y} \text{comb}\left(\frac{k_x}{\Delta k_x}, \frac{k_y}{\Delta k_y}\right) \\ &= G(k_x, k_y) \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} \delta(k_x - m\Delta k_x, k_y - n\Delta k_y) \\ &= \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} G(m\Delta k_x, n\Delta k_y) \delta(k_x - m\Delta k_x, k_y - n\Delta k_y) \end{aligned}$$


T.T. Liu, BE280A, UCSD Fall 2004

2D k-space sampling

$$\begin{aligned}
g_s(x, y) &= F^{-1}[G_s(k_x, k_y)] \\
&= F^{-1}\left[G(k_x, k_y) \frac{1}{\Delta k_x \Delta k_y} \text{comb}\left(\frac{k_x}{\Delta k_x}, \frac{k_y}{\Delta k_y}\right)\right] \\
&= F^{-1}[G(k_x, k_y)] * F^{-1}\left[\frac{1}{\Delta k_x \Delta k_y} \text{comb}\left(\frac{k_x}{\Delta k_x}, \frac{k_y}{\Delta k_y}\right)\right] \\
&= g(x, y) * \text{comb}(x \Delta k_x) \text{comb}(y \Delta k_y) \\
&= g(x) ** \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} \delta(x \Delta k_x - m) \delta(y \Delta k_y - n) \\
&= g(x) * \frac{1}{\Delta k_x \Delta k_y} \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} \delta(x - \frac{m}{\Delta k_x}) \delta(y - \frac{n}{\Delta k_y}) \\
&= \frac{1}{\Delta k_x \Delta k_y} \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} g(x - \frac{m}{\Delta k_x}, y - \frac{n}{\Delta k_y})
\end{aligned}$$

T.T. Liu, BE280A, UCSD Fall 2004

Nyquist Conditions

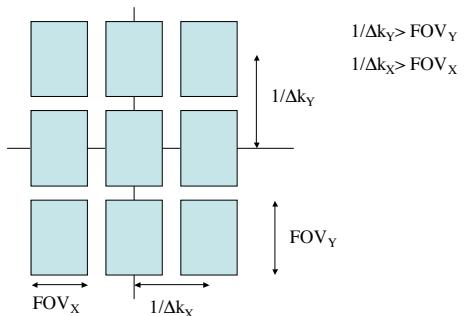

T.T. Liu, BE280A, UCSD Fall 2004

Aliasing

