




Bioengineering 280A Principles of Biomedical Imaging Fall Quarter 2006 X-Rays Lecture 1

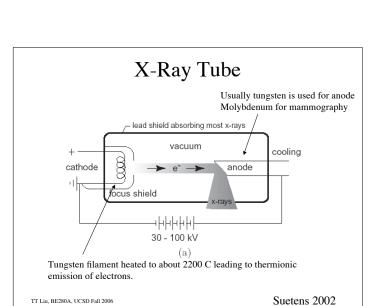


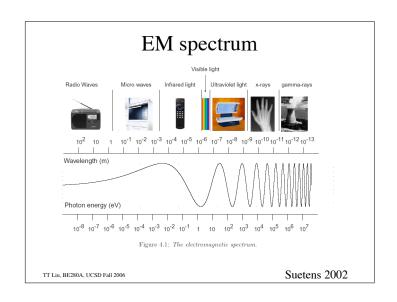

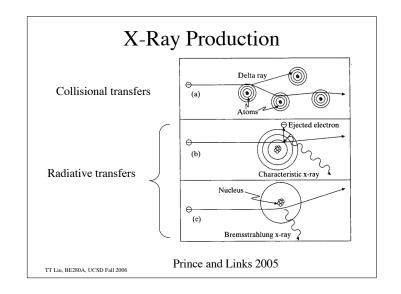

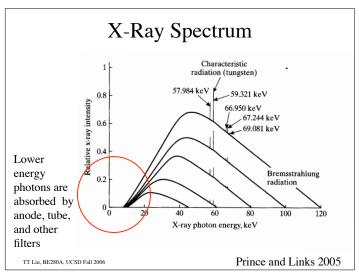

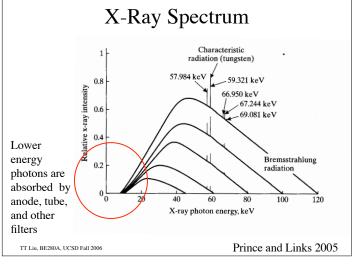


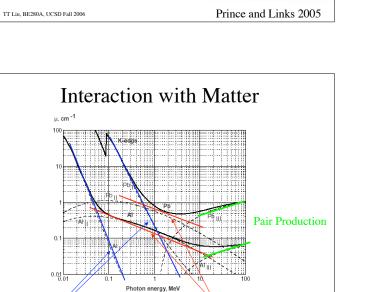



Photoelectric absorption

TT Liu, BE280A, UCSD Fall 2006

Compton Scattering

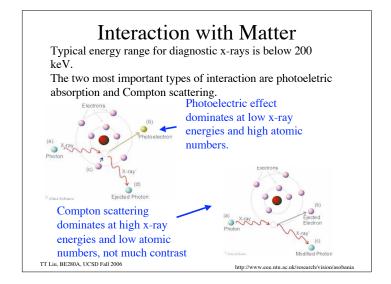

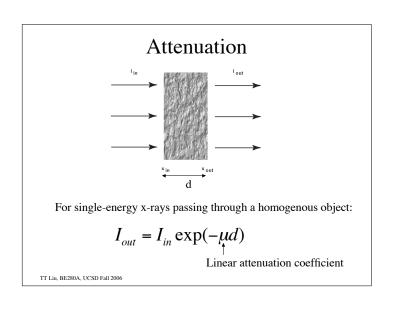

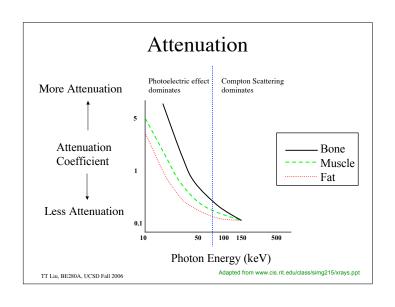

X-ray	HVL,	HVL
energy	muscle	Bone (cm)
(keV)	(cm)	
30	1.8	0.4
50	3.0	1.2
100	3.9	2.3
150	4.5	2.8

Half Value Layer

In chest radiography, about 90% of x-rays are absorbed by body. Average energy from a tungsten source is 68 keV. However, many lower energy beams are absorbed by tissue, so average energy is higher. This is referred to as beam-hardening, and reduces the contrast.

TT Liu, BE280A, UCSD Fall 2006

Values from Webb 2003

Attenuation

For an inhomogenous object:

$$I_{out} = I_{in} \exp\left(-\int_{x_{in}}^{x_{out}} \mu(x) dx\right)$$

Integrating over energies

$$I_{out} = \int_0^\infty \sigma(E) \exp\left(-\int_{x_{in}}^{x_{out}} \mu(E, x) dx\right) dE$$

Intensity distribution of beam

TT Liu, BE280A, UCSD Fall 2006

