

Bioengineering 280A
Principles of Biomedical Imaging

Fall Quarter 2004
Lecture 4
2D Fourier Transforms

Thomas Liu, BE280A, UCSD Fall 2004

Topics

1. 2D Signal Representations
2. 2D Fourier Transform
3. Transform Pairs
4. FT Properties

Thomas Liu, BE280A, UCSD Fall 2004

2D Signal

$$\begin{array}{|c|c|} \hline a & b \\ \hline c & d \\ \hline \end{array} = \begin{array}{|c|c|} \hline a & 0 \\ \hline 0 & 0 \\ \hline \end{array} + \begin{array}{|c|c|} \hline 0 & b \\ \hline 0 & 0 \\ \hline \end{array} + \begin{array}{|c|c|} \hline 0 & 0 \\ \hline c & 0 \\ \hline \end{array} + \begin{array}{|c|c|} \hline 0 & 0 \\ \hline 0 & d \\ \hline \end{array}$$

Thomas Liu, BE280A, UCSD Fall 2004

Image Decomposition

$$\begin{array}{|c|c|} \hline a & b \\ \hline c & d \\ \hline \end{array} = \begin{array}{|c|c|} \hline a & 1 & 0 \\ \hline 0 & 0 \\ \hline \end{array} + \begin{array}{|c|c|} \hline b & 0 & 1 \\ \hline 0 & 0 \\ \hline \end{array} + \begin{array}{|c|c|} \hline c & 0 & 0 \\ \hline 1 & 0 \\ \hline \end{array} + \begin{array}{|c|c|} \hline d & 0 & 0 \\ \hline 0 & 1 \\ \hline \end{array}$$

$$g[m,n] = a\delta[m,n] + b\delta[m,n-1] + c\delta[m-1,n] + d\delta[m-1,n-1]$$

$$= \sum_{k=0}^1 \sum_{l=0}^1 g[k,l]\delta[m-k,n-l]$$

$$= \sum_{k=0}^1 \sum_{l=0}^1 c_{k,l} b_{k,l}[m,n]$$

Thomas Liu, BE280A, UCSD Fall 2004

Orthonormal Basis Functions

Discrete

$$\begin{aligned}\langle b_{k,l}, b_{k',l'} \rangle &= \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} b_{k,l}^*[m,n] b_{k',l'}[m,n] \\ &= \delta[k - k', l - l']\end{aligned}$$

Continuous

$$\begin{aligned}\langle b_{k_x, k_y}, b_{k'_x, k'_y} \rangle &= \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} b_{k_x, k_y}^*(x, y) b_{k'_x, k'_y}(x, y) dx dy \\ &= \delta(k_x - k'_x, k_y - k'_y)\end{aligned}$$

Thomas Liu, BE280A, UCSD Fall 2004

Example

Are these orthonormal?

1	0
0	0

0	1
0	0

0	0
1	0

0	0
0	1

Thomas Liu, BE280A, UCSD Fall 2004

Example

Are these orthonormal?

1/2	1/2		1/2	-1/2
1/2	1/2		1/2	-1/2
1/2	1/2		1/2	-1/2
-1/2	-1/2		-1/2	1/2

Thomas Liu, BE280A, UCSD Fall 2004

Discrete Expansion Coefficients

The discrete expansion is

$$g[m,n] = \sum_{k=-\infty}^{\infty} \sum_{l=-\infty}^{\infty} c_{k,l} b_{k,l}[m,n]$$

If the basis functions $b_{k,l}[m,n]$ are orthonormal then

$$\begin{aligned} c_{k,l} &= \langle b_{k,l}, g \rangle = \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} b_{k,l}^*[m,n] g[m,n] \\ &= \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} b_{k,l}^*[m,n] \sum_{k'=-\infty}^{\infty} \sum_{l'=-\infty}^{\infty} c_{k',l'} b_{k',l'}[m,n] \\ &= \sum_{k'=-\infty}^{\infty} \sum_{l'=-\infty}^{\infty} c_{k',l'} \sum_{m=-\infty}^{\infty} \sum_{n=-\infty}^{\infty} b_{k,l}^*[m,n] b_{k',l'}[m,n] \\ &= \sum_{k'=-\infty}^{\infty} \sum_{l'=-\infty}^{\infty} c_{k',l'} \delta[k-k', l-l'] \\ &= c_{k,l} \end{aligned}$$

Thomas Liu, BE280A, UCSD Fall 2004

Continuous Expansion Coefficients

The continuous expansion is

$$g(x, y) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} c(k_x, k_y) b_{k_x, k_y}(x, y) dk_x dk_y$$

If the basis functions $b_{k_x, k_y}(x, y)$ are orthonormal then

$$\begin{aligned} c(k_x, k_y) &= \langle b_{k_x, k_y}, g \rangle = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} b_{k_x, k_y}^*(x, y) g(x, y) dx dy \\ &= \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} b_{k_x, k_y}^*(x, y) \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} c(k'_x, k'_y) b_{k'_x, k'_y}(x, y) dk'_x dk'_y dx dy \\ &= \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} c(k'_x, k'_y) \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} b_{k_x, k_y}^*(x, y) b_{k'_x, k'_y}(x, y) dx dy dk'_x dk'_y \\ &= \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} c(k'_x, k'_y) \delta(k_x - k'_x, k_y - k'_y) dk'_x dk'_y \\ &= c(k_x, k_y) \end{aligned}$$

Thomas Liu, BE280A, UCSD Fall 2004

Separable Basis Functions

Discrete

$$b_{k,l}[m, n] = b_k[m] b_l[n]$$

$$e.g. \quad \delta[m - k, n - l] = \delta[m - k] \delta[n - l]$$

Continuous

$$b_{k_x, k_y}(x, y) = b_{k_x}(x) b_{k_y}(y)$$

$$e.g. \quad \delta(x - x_i, y - y_i) = \delta(x - x_i) \delta(y - y_i)$$

Thomas Liu, BE280A, UCSD Fall 2004

Separable Basis Functions

$$b_1[n] = [1 \quad 0]$$

$$b_1[m] = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ 0 & 0 \end{bmatrix}$$

$$b_2[n] = [0 \quad 1]$$

$$b_1[m] = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}$$

$$b_1[n] = [1 \quad 0]$$

$$b_2[m] = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix}$$

$$b_2[n] = [0 \quad 1]$$

$$b_2[m] = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix}$$

Thomas Liu, BE280A, UCSD Fall 2004

Separable Basis Functions

$$b_1[n] = [1 \quad 1]/\sqrt{2}$$

$$b_1[m] = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix} \begin{bmatrix} 1/2 & 1/2 \\ 1/2 & 1/2 \end{bmatrix}$$

$$b_2[n] = [1 \quad -1]/\sqrt{2}$$

$$b_1[m] = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix} \begin{bmatrix} 1/2 & -1/2 \\ 1/2 & -1/2 \end{bmatrix}$$

$$b_1[n] = [1 \quad 1]/\sqrt{2}$$

$$b_1[m] = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -1 \end{bmatrix} \begin{bmatrix} 1/2 & 1/2 \\ -1/2 & -1/2 \end{bmatrix}$$


$$b_2[n] = [1 \quad -1]/\sqrt{2}$$

$$b_1[m] = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -1 \end{bmatrix} \begin{bmatrix} 1/2 & -1/2 \\ -1/2 & 1/2 \end{bmatrix}$$

$$b_{k,l}[m,n] = b_k[m] b_l[n] \quad b_k[m] = \exp(-\pi mk)/\sqrt{2} \quad b_l[n] = \exp(-\pi nl)/\sqrt{2}$$

Thomas Liu, BE280A, UCSD Fall 2004

Example

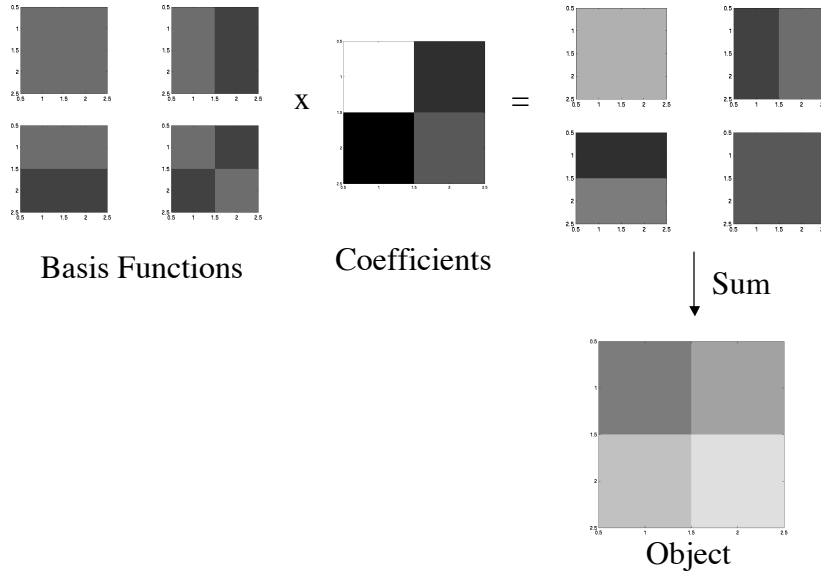

Thomas Liu, BE280A, UCSD Fall 2004

Fourier Basis Functions

Recall that for 1D the basis functions are complex exponentials

$$b_{k_x}(x) = e^{j2\pi k_x x}$$

For 2D, we use the separable 2D functions


$$b_{k_x, k_y}(x, y) = b_{k_x}(x)b_{k_y}(y) = e^{j2\pi k_x x} e^{j2\pi k_y y} = e^{j2\pi(k_x x + k_y y)}$$

Are they orthonormal?

Thomas Liu, BE280A, UCSD Fall 2004


Plane Waves

$$e^{j2\pi(k_x x + k_y y)} = \cos(2\pi(k_x x + k_y y)) + j \sin(2\pi(k_x x + k_y y))$$

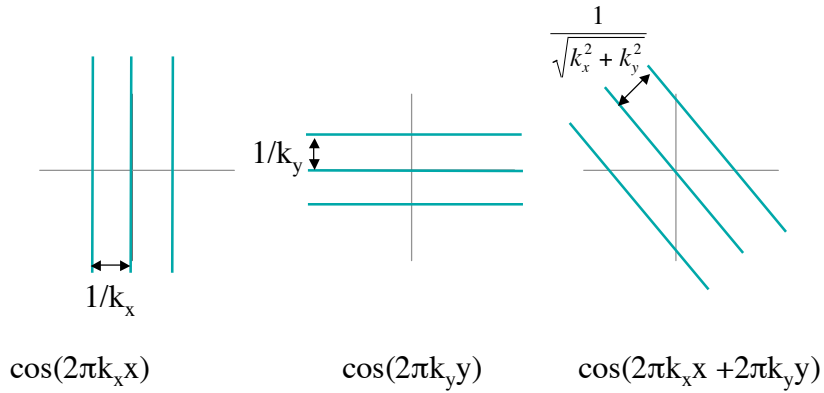

Thomas Liu, BE280A, UCSD Fall 2004

Plane Waves

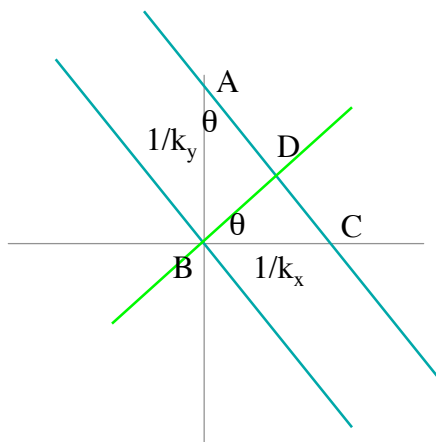

$$\triangle ABC \sim \triangle BDC$$

$$\frac{AC}{BC} = \frac{AB}{BD}$$

$$BD = AB \frac{BC}{AC} = \frac{\frac{1}{k_x} \frac{1}{k_y}}{\sqrt{\frac{1}{k_x^2} + \frac{1}{k_y^2}}} = \frac{1}{\sqrt{k_x^2 + k_y^2}}$$

$$\theta = \arctan\left(\frac{k_y}{k_x}\right)$$

Thomas Liu, BE280A, UCSD Fall 2004

2D Fourier Transform

Fourier Transform

$$G(k_x, k_y) = F[g(x, y)] = \left\langle e^{j2\pi(k_x x + k_y y)}, g \right\rangle = \int_{-\infty}^{\infty} g(x, y) e^{-j2\pi(k_x x + k_y y)} dx dy$$

Inverse Fourier Transform

$$g(x, y) = \int_{-\infty}^{\infty} G(k_x, k_y) e^{j2\pi(k_x x + k_y y)} dk_x dk_y$$

Thomas Liu, BE280A, UCSD Fall 2004

Separable Functions

$g(x, y)$ is said to be a separable function if it can be written as $g(x, y) = g_x(x)g_y(y)$.
The Fourier Transform is then separable as well.

$$\begin{aligned} G(k_x, k_y) &= \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} g(x, y) e^{-j2\pi(k_x x + k_y y)} dx dy \\ &= \int_{-\infty}^{\infty} g_x(x) e^{-j2\pi k_x x} dx \int_{-\infty}^{\infty} g_y(y) e^{-j2\pi k_y y} dy \\ &= \tilde{G}_x(k_x) \tilde{G}_y(k_y) \end{aligned}$$



Example

$$\begin{aligned} g(x, y) &= \Pi(x)\Pi(y) \\ G(k_x, k_y) &= \text{sinc}(k_x)\text{sinc}(k_y) \end{aligned}$$

Thomas Liu, BE280A, UCSD Fall 2004





Example (sinc/rect)

Example
 $g(x, y) = \Pi(x)\Pi(y)$
 $G(k_x, k_y) = \text{sinc}(k_x)\text{sinc}(k_y)$



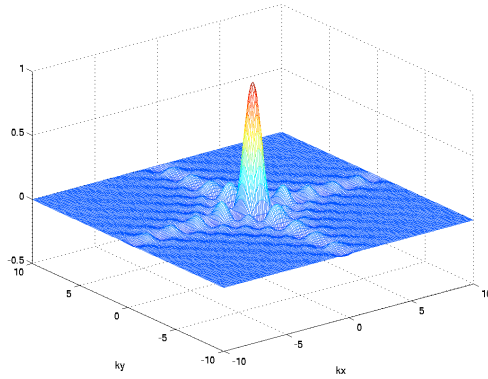
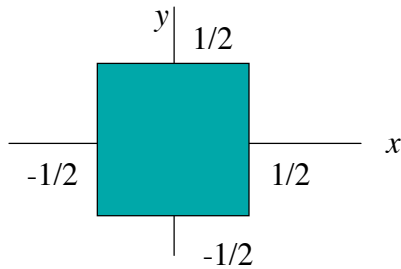


Thomas Liu, BE280A, UCSD Fall 2004





Example (sinc/rect)







Examples







Examples



Examples



Examples



Examples

$$g(x, y) = \delta(x, y) = \delta(x)\delta(y)$$

$$G(k_x, k_y) = 1$$

$$g(x, y) = \delta(x)$$


$$G(k_x, k_y) = \delta(k_y) \text{ !!!}$$

Thomas Liu, BE280A, UCSD Fall 2004

Examples


$$g(x, y) = 1 + e^{-j2\pi ax}$$

$$G(k_x, k_y) = \delta(k_x, k_y) + \delta(k_x + a)\delta(k_y)$$

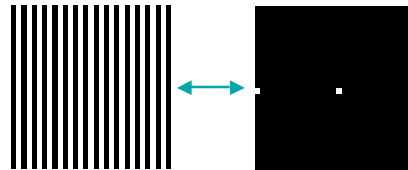


$$g(x, y) = 1 + e^{j2\pi ay}$$

$$G(k_x, k_y) = \delta(k_x, k_y) + \delta(k_x)\delta(k_y - a)$$

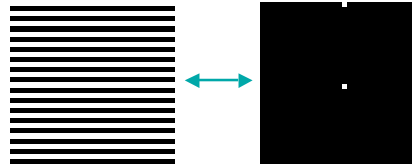

Thomas Liu, BE280A, UCSD Fall 2004

Examples

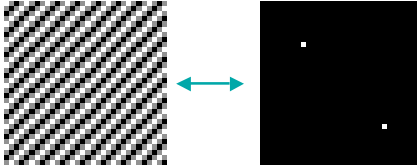


$$g(x, y) = \cos(2\pi(ax + by))$$

$$G(k_x, k_y) = \frac{1}{2}\delta(k_x - a)\delta(k_y - b) + \frac{1}{2}\delta(k_x + a)\delta(k_y + b)$$

Thomas Liu, BE280A, UCSD Fall 2004

Examples

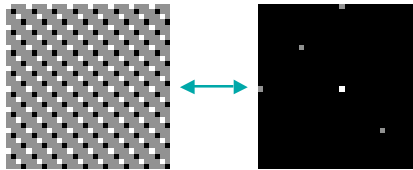



$$G(k_x, k_y) = \delta(k_x, k_y) + \delta(k_x + c)\delta(k_y) + \delta(k_x)\delta(k_y - d) + \frac{1}{2}\delta(k_x - a)\delta(k_y - b) + \frac{1}{2}\delta(k_x + a)\delta(k_y + b)$$

$$g(x, y) = ???$$



Thomas Liu, BE280A, UCSD Fall 2004

Examples

(a) original image





(b) spike at center





Examples

(c) spike off-center in k_y



(d) spike off-center in k_x



Basic Properties

Linearity

$$F[ag(x,y) + bh(x,y)] = aG(k_x, k_y) + bH(k_x, k_y)$$

Scaling

$$F[g(ax, by)] = \frac{1}{|ab|} G\left(\frac{k_x}{a}, \frac{k_y}{b}\right)$$

Shift


$$F[g(x-a, y-b)] = G(k_x, k_y) e^{-j2\pi(k_x a + k_y b)}$$

Modulation

$$F[g(x,y) e^{j2\pi(xa+yb)}] = G(k_x - a, k_y - b)$$

Thomas Liu, BE280A, UCSD Fall 2004

Modulation Example

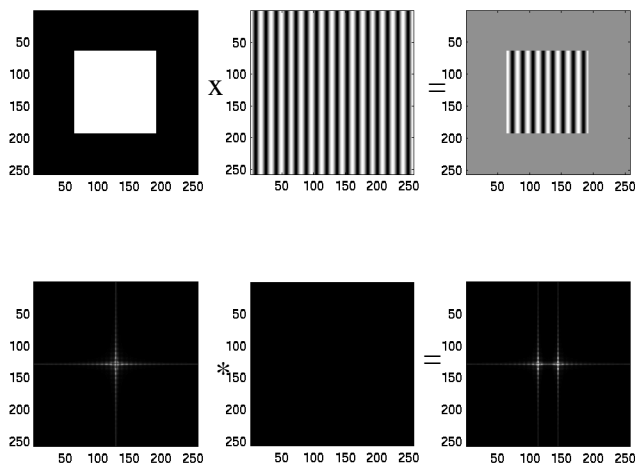

Thomas Liu, BE280A, UCSD Fall 2004

Convolution/Multiplication

Convolution

$$F[g(x,y)**h(x,y)] = G(k_x,k_y)H(k_x,k_y)$$


Multiplication

$$F[g(x,y)h(x,y)] = G(k_x,k_y)**H(k_x,k_y)$$

Multiplication in one domain translates into convolution in the other domain.

Thomas Liu, BE280A, UCSD Fall 2004

Convolution Example

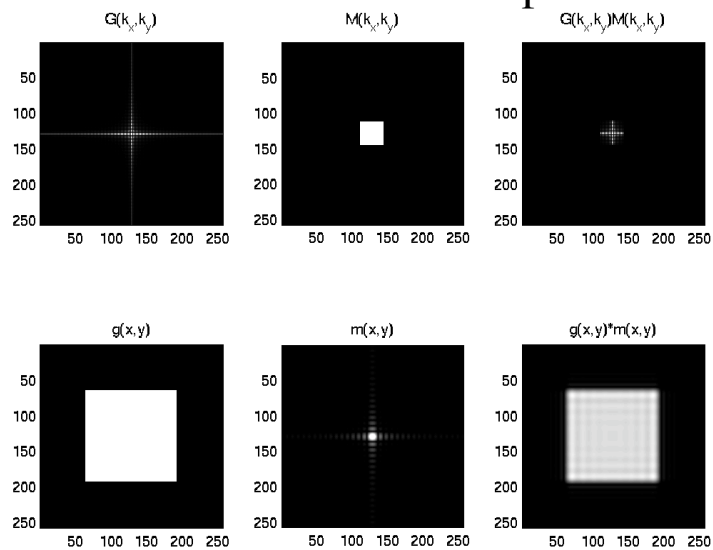


Symmetry

$$F[g^*(x,y)] = G^*(-k_x, -k_y)$$

If $g(x,y)$ is real then $g(x,y) = g^*(x,y)$, so

$$G^*(-k_x, -k_y) = G(k_x, k_y)$$

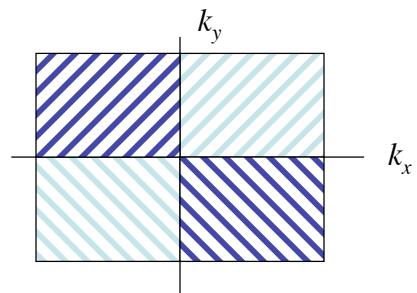

Thomas Liu, BE280A, UCSD Fall 2004

Parseval's Relations

Energy is preserved

$$\int_{-\infty}^{\infty} \int_{-\infty}^{\infty} |g(x,y)|^2 dx dy = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} |G(k_x, k_y)|^2 dk_x dk_y$$

So is the inner product

$$\langle g, h \rangle = \langle G, H \rangle$$

$$\int_{-\infty}^{\infty} \int_{-\infty}^{\infty} g^*(x,y) h(x,y) dx dy = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} G^*(k_x, k_y) H(k_x, k_y) dk_x dk_y$$

Thomas Liu, BE280A, UCSD Fall 2004