
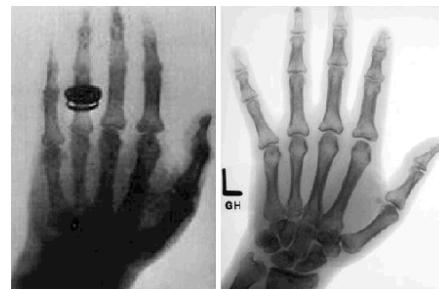


Bioengineering 280A  
Principles of Biomedical Imaging  
  
Fall Quarter 2015  
X-Rays Lecture 1

IT Liu, BE280A, UCSD Fall 2015

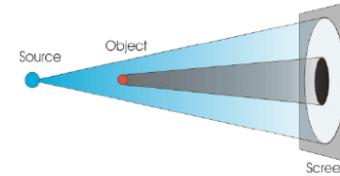

IT Liu, BE280A, UCSD Fall 2015

## EM spectrum

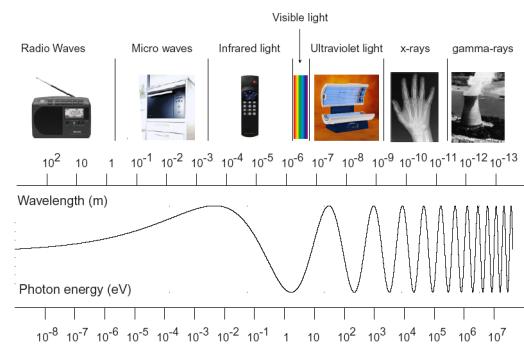


Figure 4.1: The electromagnetic spectrum.

IT Liu, BE280A, UCSD Fall 2015

Suetens 2002




<http://www.youtube.com/watch?v=wbbssbE2mQuA>

IT Liu, BE280A, UCSD Fall 2015

## X-Ray Tube

Usually tungsten is used for anode  
Molybdenum for mammography

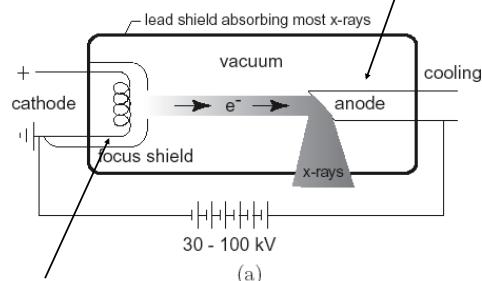


(a)

Tungsten filament heated to about 2200 C leading to thermionic emission of electrons.

IT Liu, BE280A, UCSD Fall 2015

Suetens 2002

## X-Ray Tube

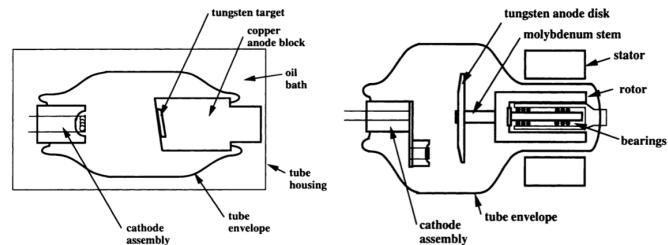


Zink, Radiographics, 1997

IT Liu, BE280A, UCSD Fall 2015

## X-Ray Production

Collisional transfers

Radiative transfers

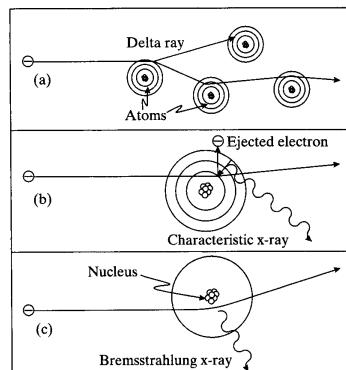


Prince and Links 2005

IT Liu, BE280A, UCSD Fall 2015

## X-Ray Spectrum

Lower energy photons are absorbed by anode, tube, and other filters

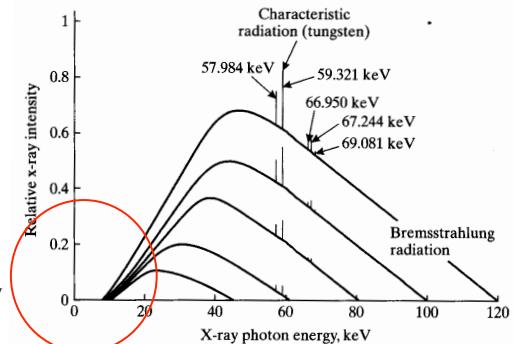


Prince and Links 2005

IT Liu, BE280A, UCSD Fall 2015

## Interaction with Matter

Typical energy range for diagnostic x-rays is below 200 keV. The two most important types of interaction are photoelectric absorption and Compton scattering.

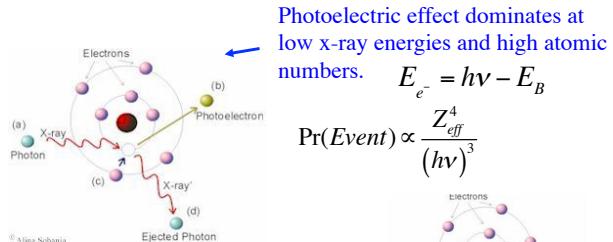


Compton scattering dominates at high x-ray energies and low atomic numbers, not much contrast

$$\Pr(\text{Event}) \propto \frac{N_A Z}{W_m} \approx \text{constant}$$

IT Liu, BE280A, UCSD Fall 2015

<http://www.eee.ntu.ac.uk/research/vision/asobania>

## X-Ray Imaging Chain

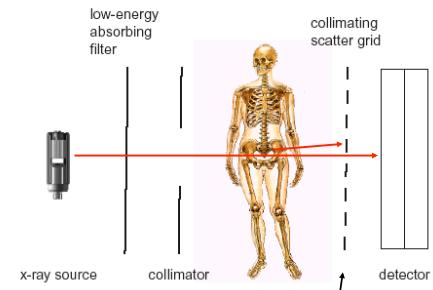


Reduces effects of Compton scattering

Suetens 2002

IT Liu, BE280A, UCSD Fall 2015


## X-ray film

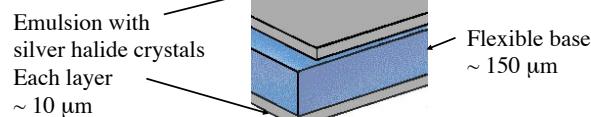

Silver halide crystals absorb optical energy. After development, crystals that have absorbed enough energy are converted to metallic silver and look dark on the screen. Thus, parts in the object that attenuate the x-rays will look brighter.

IT Liu, BE280A, UCSD Fall 2015

## Intensifying Screen

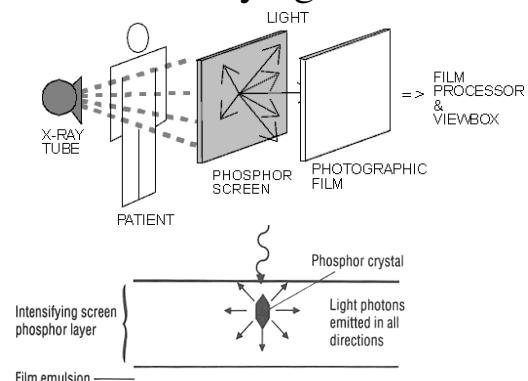

[http://learntech.uwe.ac.uk/radiography/RScience/imaging\\_principles\\_d/diagimage11.htm](http://learntech.uwe.ac.uk/radiography/RScience/imaging_principles_d/diagimage11.htm)  
<http://www.sunnybrook.utoronto.ca:8080/~selenium/xray.html#Film>

## Digital Radiography

**Table 1**  
Timetable of Developments in Digital Radiography

Year	Development
1977	Digital subtraction angiography
1980	Computed radiography (CR), storage phosphors
1987	Amorphous selenium-based image plates
1990	Charge-coupled device (CCD) slot-scan direct radiography (DR)
1994	Selenium drum DR
1995	Amorphous silicon-cesium iodide (scintillator) flat-panel detector
1995	Selenium-based flat-panel detector
1997	Gadolinium-based (scintillator) flat-panel detector
2001	Gadolinium-based (scintillator) portable flat-panel detector
2001	Dynamic flat-panel detector fluoroscopy-digital subtraction angiography

Korner et al, 2007

IT Liu, BE280A, UCSD Fall 2015

The diagram illustrates two types of digital radiography detectors. The top path shows X-rays passing through a TFT-array, then a Photoconductor (amorphous selenium) layer, and finally being converted into electrical charges by a Readout process. The bottom path shows X-rays passing through a TFT-array, then a Scintillator layer, which emits light, and a Photodiode (amorphous silicon) layer, also followed by a Readout process.

## X-Ray Examples

(a) Chest radiograph showing a yellow arrow pointing to a findings. (b) Chest radiograph showing a yellow arrow pointing to a findings. A computer monitor displays a dental radiograph with a red circle and a yellow arrow pointing to a finding.

Suetens 2002

<http://www.dentistryiq.com/content/dam/diq/online-articles/2013/03/DXRsoftwaresensor.jpg>

IT Liu, BE280A, UCSD Fall 2015

## X-Ray w/ Contrast Agents

Angiogram using an iodine-based contrast agent.  
K-edge of iodine is 33.2 keV

Barium Sulfate  
K-edge of Barium is 37.4 keV

Suetens 2002

IT Liu, BE280A, UCSD Fall 2015

## Intensity

$$I = E\phi$$

Energy      Photon flux rate

$$\phi = \frac{N}{A\Delta t}$$


Unit Area      Number of photons  
Unit Time

IT Liu, BE280A, UCSD Fall 2015

## Intensity

$$\phi = \int_0^\infty S(E') dE'$$


X-ray spectrum

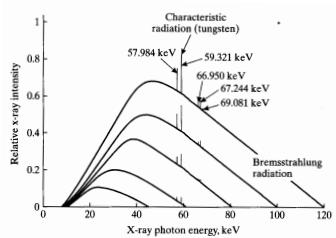

$$I = \int_0^\infty S(E') E' dE'$$

IT Liu, BE280A, UCSD Fall 2015

## Attenuation

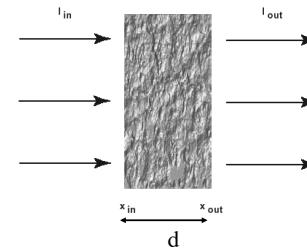

For single-energy x-rays passing through a homogenous object:

$$I_{out} = I_{in} \exp(-\mu d)$$

Linear attenuation coefficient

IT Liu, BE280A, UCSD Fall 2015

## Attenuation

$$n = \mu N \Delta x \text{ photons lost per unit length}$$

$$\mu = \frac{n}{N \Delta x} \text{ fraction of photons lost per unit length}$$

$$\Delta N = -n \longrightarrow \frac{dN}{dx} = -\mu N \longrightarrow N(x) = N_0 e^{-\mu x}$$

For mono-energetic case, intensity is

$$I(\Delta x) = I_0 e^{-\mu \Delta x}$$

IT Liu, BE280A, UCSD Fall 2015

## Attenuation

Inhomogeneous Slab





$$\frac{dN}{dx} = -\mu(x)N \longrightarrow N(x) = N_0 \exp\left(-\int_0^x \mu(x') dx'\right)$$

$$I(x) = I_0 \exp\left(-\int_0^x \mu(x') dx'\right)$$

Attenuation depends on energy, so also need to integrate over energies

$$I(x) = \int_0^\infty S_0(E') E' \exp\left(-\int_0^x \mu(x'; E') dx'\right) dE'$$

IT Liu, BE280A, UCSD Fall 2015

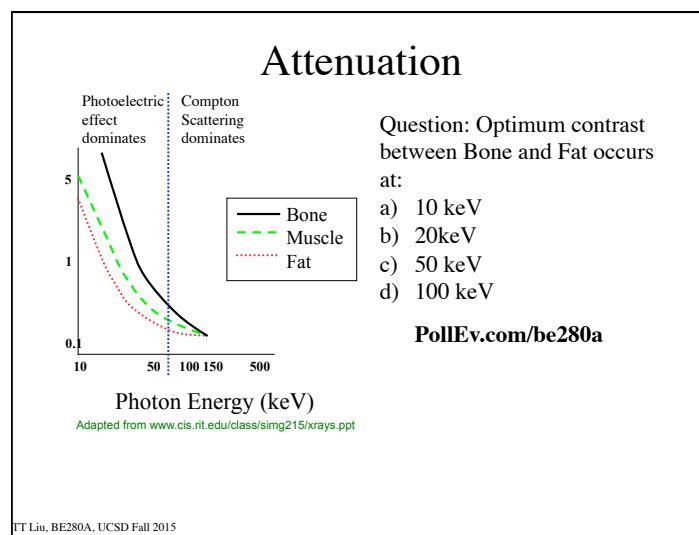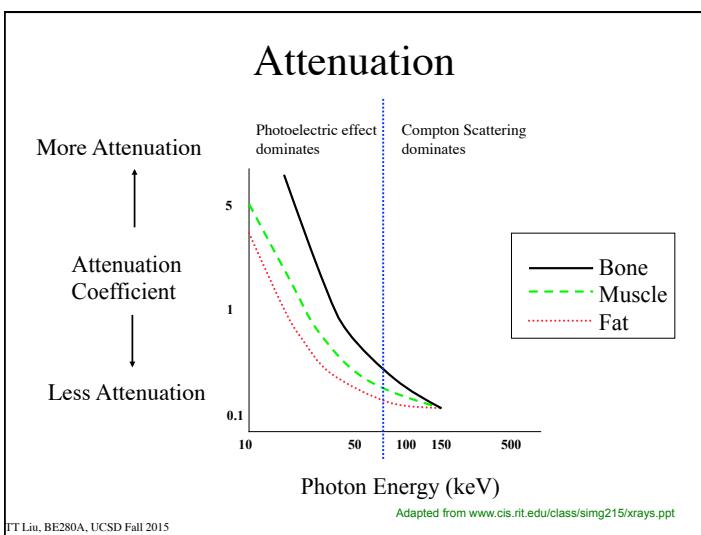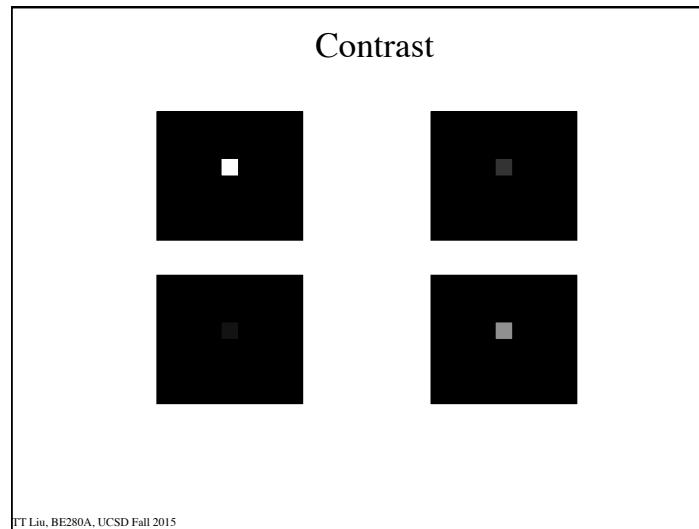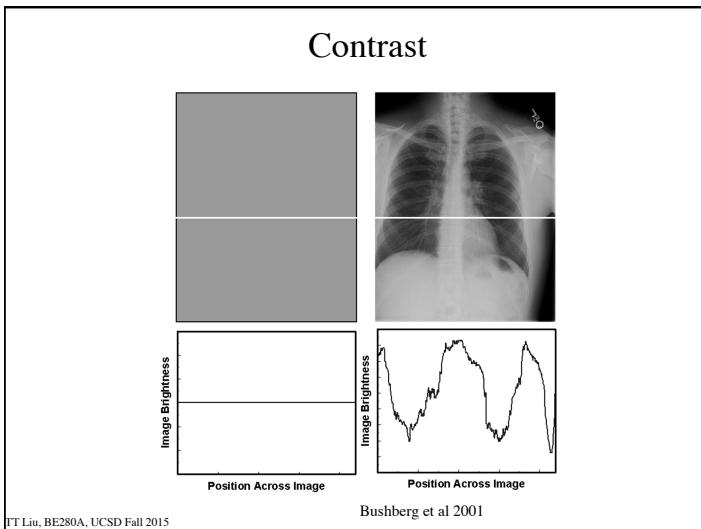

## Half Value Layer


X-ray energy (keV)	HVL, muscle (cm)	HVL Bone (cm)
30	1.8	0.4
50	3.0	1.2
100	3.9	2.3
150	4.5	2.8

In chest radiography, about 90% of x-rays are absorbed by body. Average energy from a tungsten source is 68 keV. However, many lower energy beams are absorbed by tissue, so average energy is higher. This is referred to as beam-hardening, and reduces the contrast.

Values from Webb 2003


IT Liu, BE280A, UCSD Fall 2015

## X-Ray Imaging Geometry

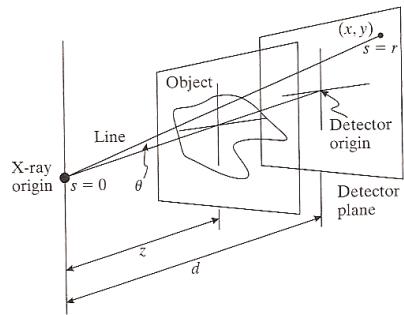


Prince and Links 2005

IT Liu, BE280A, UCSD Fall 2015

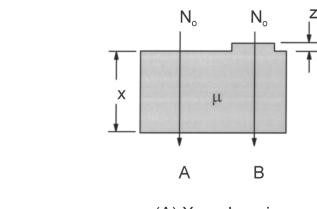

(A) X-ray Imaging



(B) MR Imaging

Bushberg et al 2001

## Subject Contrast

$$\begin{aligned} C_s &= \frac{A - B}{A} \\ &= \frac{N_0 \exp(-\mu x) - N_0 \exp(-\mu(x+z))}{N_0 \exp(-\mu x)} \\ &= 1 - \exp(-\mu z) \end{aligned}$$


IT Liu, BE280A, UCSD Fall 2015

## Inverse Square Law

### Inverse Square Law

$$I_0 = \frac{I_s}{4\pi d^2}$$

$$\begin{aligned} I_d(x, y) &= \frac{I_s}{4\pi r^2} \quad \text{where } r^2 = x^2 + y^2 + d^2 \\ &= \frac{I_0 d^2}{r^2} = I_0 \cos^2 \theta \end{aligned}$$





Prince and Links 2005

IT Liu, BE280A, UCSD Fall 2015

## Obliquity Factor

Obliquity Factor

$$I_d(x, y) = I_0 \cos \theta$$

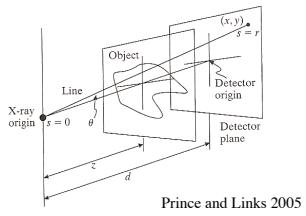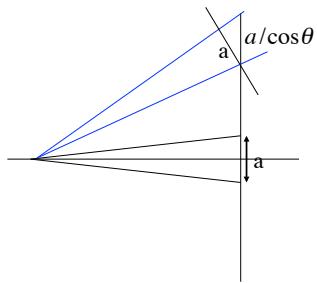

Prince and Links 2005

IT Liu, BE280A, UCSD Fall 2015

## X-Ray Imaging Geometry

Beam Divergence and Flat Panel

$$I_r = I_0 \cos^3 \theta$$

Example : Chest x - ray at 2 yards with 14x17 inch film.

Question : What is the smallest ratio  $I_r/I_0$  across the film?



$$r_d = \sqrt{7^2 + 8.5^2} = 11$$

$$\cos \theta = \frac{d}{\sqrt{r_d^2 + d^2}} = 0.989$$

$$\frac{I_r}{I_0} = \cos^3 \theta = 0.966$$

IT Liu, BE280A, UCSD Fall 2015

## Path Length

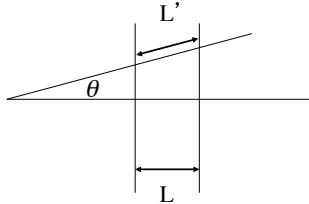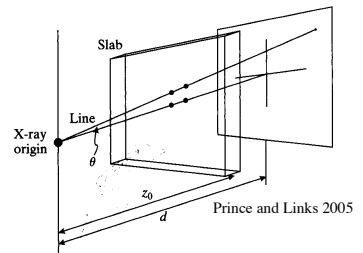


$$L' = L / \cos \theta$$

$$I_d(x, y) = I_0 \cos^3 \theta \exp(-\mu L / \cos \theta)$$

IT Liu, BE280A, UCSD Fall 2015

## Magnification of Object

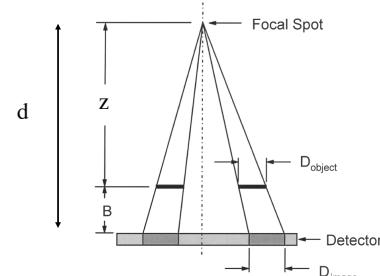


$$M(z) = \frac{d}{z}$$

$$= \frac{\text{Source to Image Distance (SID)}}{\text{Source to Object Distance (SOD)}}$$


IT Liu, BE280A, UCSD Fall 2015

Bushberg et al 2001

## Magnification of Object

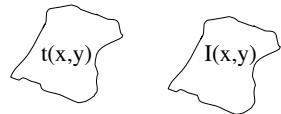

$$M = 1: I(x,y) = t(x,y)$$



$$M = 2: I(x,y) = t(x/2,y/2)$$

$$\text{In general, } I(x,y) = t(x/M(z),y/M(z))$$

IT Liu, BE280A, UCSD Fall 2015

## Object Magnification


**Question:** All other things being equal, the optimal distance ( $z$ ) between the source and the object is

- a) 0
- b)  $d/5$
- c)  $d/2$
- d)  $d$

where  $d$  is the distance between the source and the detector.

[PollEv.com/be280a](http://PollEv.com/be280a)

IT Liu, BE280A, UCSD Fall 2015

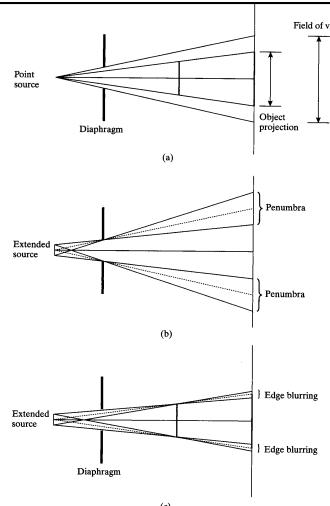


**Figure 5.18**  
Effects of extended source.  
(a) Ideal field of view and object projection (with magnification). (b) Penumbra at edges of field of view due to extended source. (c) Blurred object edges due to extended source.

IT Liu, BE280A,

Prince and Link 2005

## Source magnification

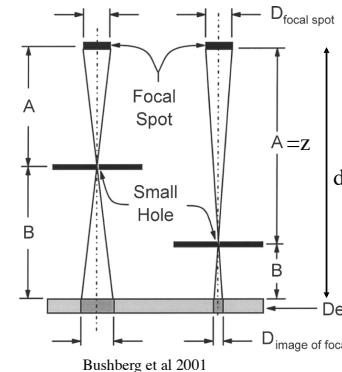

$$\frac{D_{image}}{D_{focal}} = \frac{d - z}{z}$$

$$m(z) = -\frac{d - z}{z} = -\frac{B}{A}$$

$$= 1 - M(z)$$

IT Liu, BE280A, UCSD Fall 2015

## Source Magnification


**Question:** All other things being equal, the optimal distance ( $z$ ) between the source and the object for minimizing the effects of source magnification is:

- a) 0
- b)  $d/5$
- c)  $d/2$
- d)  $d$

where  $d$  is the distance between the source and the detector.

[PollEv.com/be280a](http://PollEv.com/be280a)

IT Liu, BE280A, UCSD Fall 2015

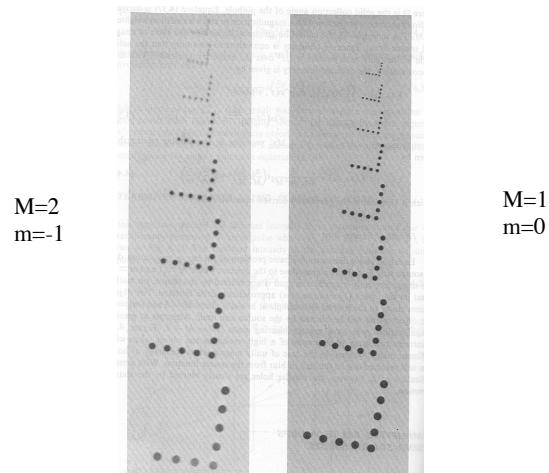


Macovski 1983

IT Liu, BE280A, UCSD Fall 2015


## Rectangle Function

$$\Pi(x) = \begin{cases} 0 & |x| > 1/2 \\ 1 & |x| \leq 1/2 \end{cases}$$

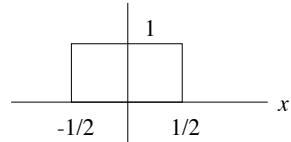

Also called  $\text{rect}(x)$

$$\Pi(x,y) = \Pi(x)\Pi(y)$$

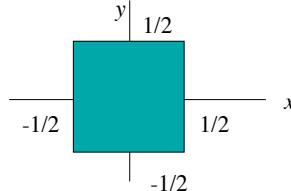

IT Liu, BE280A, UCSD Fall 2015

## Dirac Delta Function

Notation :

$\delta(x)$  - 1D Dirac Delta Function

$\delta(x,y)$  or  $^2\delta(x,y)$  - 2D Dirac Delta Function

$\delta(x,y,z)$  or  $^3\delta(x,y,z)$  - 3D Dirac Delta Function


$\delta(\vec{r})$  - N Dimensional Dirac Delta Function

IT Liu, BE280A, UCSD Fall 2015

## 1D Dirac Delta Function

$$\delta(x) = 0 \text{ when } x \neq 0 \text{ and } \int_{-\infty}^{\infty} \delta(x) dx = 1$$

Can interpret the integral as a limit of the integral of an ordinary function that is shrinking in width and growing in height, while maintaining a constant area. For example, we can use a shrinking rectangle function such that  $\int_{-\infty}^{\infty} \delta(x) dx = \lim_{\tau \rightarrow 0} \int_{-\infty}^{\infty} \tau^{-1} \Pi(x/\tau) dx$ .



IT Liu, BE280A, UCSD Fall 2015

## Image of a point object

$$I_d(x,y) = ks(x/m, y/m)$$

Assume  $s(x,y)$  has unit area

$$\iint ks(x/m(z), y/m(z)) dx dy = \text{constant}$$


$$\Rightarrow k = \frac{1}{m^2(z)}$$

$$I_d(x,y) = \lim_{m \rightarrow 0} \frac{s(x/m, y/m)}{m^2} \\ = \delta(x,y)$$




IT Liu, BE280A, UCSD Fall 2015


## X-Ray Imaging

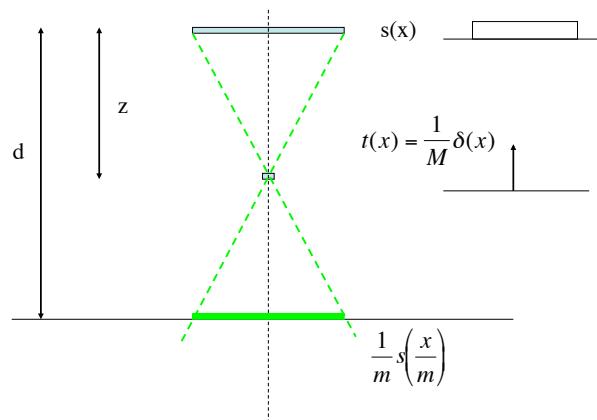


IT Liu, BE280A, UCSD Fall 2015




Assume  $z=d/2$



Assume  $z=0.1d$

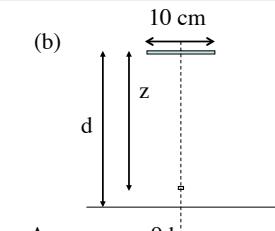

Assume  $z=.9d$



Assume  $z=.99d$

[PolEv.com/be280a](http://PolEv.com/be280a)

